

TWIN TASK®-3AAA - LASER COMBO/ALL LED ALKALINE BATTERY-POWERED FLASHLIGHT

MARKET

APPLICATIONS: Professional Light - Hardware/Tool, Industrial, Law Enforcement, Security, Automotive, Outdoor, Consumer.

DESCRIPTION:

The TT-3AAA flashlight features a laser pointer and the latest in LED technology. The C4® power LED with its textured reflector gives it an even beam, along with a piercing hotspot for distance. The five ultra bright LEDs are great for area lighting and provide extended run time. Light offers four position lighting - Laser only, C4® LED, Laser/C4® LED combo, or five (5) ultra bright white LEDs. Packaged with a high-strength lanyard.

CASE MATERIAL:

Machined aluminum case with non-slip knurled grip and a matte black anodized finish.

DIMENSIONS:

Length: 5.38 in. (13.69 cm) Major Diameter: 1.57 in. (3.98 cm)
Body Diameter: 1.17 in. (2.98 cm)

WEIGHT:

7.04 oz. (200 grams) with alkaline batteries

LENS:

Glass lens.

LIGHT SOURCE:

Pre-focused visible red Laser cartridge.
C4® LED technology, impervious to shock with a 50,000 hour lifetime.
Five (5) ultra bright white LEDs with 100,000 hour lifetime.

LIGHT OUTPUT:


See chart below for lumens, runtime, distance and intensity of each light source. Intensity is reported in units of Candela. (cd)

Laser rating: 650 nM wavelength, Class IIIa (3R), <5 mW laser output power.

LASER OUTPUT:

Usable range of 100 yards (+) when using laser pointer only.
Usable range of 100 feet (+) when in Laser/C4® LED combo position.

ON/OFF:

Push button head switch - sequences through Laser only, C4®LED, Laser/C4®LED combo, (5) Ultra bright LEDs and Off.

RUN TIME:


See Chart. All run time claims are to 10% of initial lumen output.

BATTERY:

Three (3) "AAA" size alkaline batteries.

FEATURES:


C4® LED technology for extreme brightness.
IPX4 rated for water resistant operation. All openings o-ring sealed.
1 meter impact resistance tested.

APPROVALS:

☑ Meets applicable European Community Directives.
Complies with 21 CFR 1040.10 as amended by Laser Notice 50; 20 July 01
Laser /LED radiation; avoid direct eye contact.

WARRANTY:

Streamlight's Limited Lifetime Warranty warrants this product to be free of defects, including the LED, for a lifetime of use. We will repair, replace or refund the purchase price, at our option, of any Streamlight product that does not work as a result of a manufacturing defect for as long as you own it. This limited lifetime warranty excludes abuse, batteries, switches, electronics and normal wear and tear. Switches and electronics have a two (2) year warranty with proof of purchase.

OPTIONAL ACCESSORIES:

Holster

OUTPUT


RUNTIME

DISTANCE

INTENSITY

| FL 1 STANDARD | C4 LED | 5x5mm LED |
|---------------|------------|-----------|
| | 100 LUMENS | 68 LUMENS |
| | 2h 45min | 5h 15min |
| | 90m | 57m |
| | 2000cd | 800cd |

PERFORMANCE CURVE

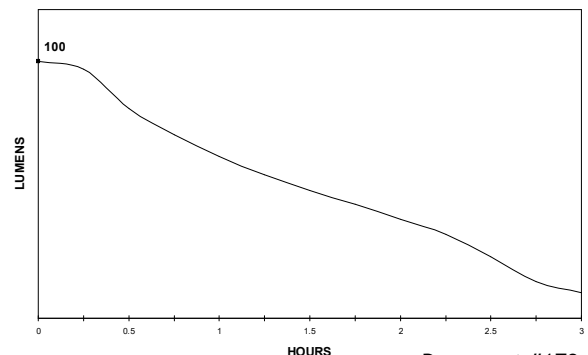

All performance claims to ANSI/PLATO FL1-2016 Standard

Issued: 01/07/2011

Revised: 01/08/2018

Rev: 1

Made In China

Document #179